



## Milliken Obex Prior

### Specification:

**Syncros 16mm Milliken Obex Prior in Closed / Open Format**



Closed Format

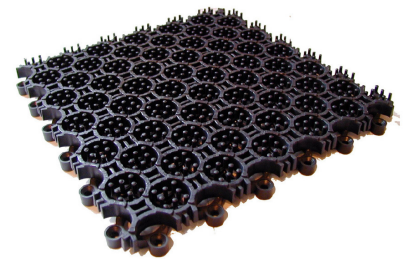

Open Format

Tile Material:	UV Resistant PVC
Tile Construction:	Closed / Open
Total thickness:	16mm
Tile Size:	Nominal 200 x200mm, usable 195 xs195mm when installed
Tile Colour:	Graphite

Tile Construction;	
Composition:	100% PVC
Mass:	7110g/m <sup>2</sup> (open) / 9340g/m <sup>2</sup> (closed)
Tile thickness:	16mm

Performance:	
Flammability;	low radius of effect of ignition (BS4790)
Friction resistance;	B – DS/EN ISO 8295 (2004)
Wear resistance:	pass (66,000 cycles Vetterman test)
Ozone resistance:	pass (50pph ozone at 30c)
Temperature resistance:	-30c to +50c

## Milliken Obex Prior

### Specification:

**Syncros 11mm Milliken Obex Prior in Closed**



11mm Prior Closed Format

Tile Material:	UV Resistant PVC
Tile Construction:	Closed
Total thickness:	11mm
Tile Size:	Nominal 200 x200mm, usable 195 xs195mm when installed
Tile Colour:	Graphite

Tile Construction;	
Composition:	100% PVC
Mass:	5420g/m <sup>2</sup>
Tile thickness:	11mm

Performance:	
Flammability;	low radius of effect of ignition (BS4790)
Friction resistance;	B – DS/EN ISO 8295 (2004)
Wear resistance:	pass (66,000 cycles Vetterman test)
Ozone resistance:	pass (50pph ozone at 30c)
Temperature resistance:	-30c to +50c