


SPECIFICATION

INTRAFLOW®

Product Reference	INTRAFLOW® Entrance Matting
Strength Rating	Extreme – suitable for areas with heavy foot and wheeled traffic
Zonal Location	Use Zone 1 inserts for external areas Use Zone 2 inserts for internal areas Combination Zone 1 & 2 inserts can be specified for dual performance Surface mounted applications with use of ramped edging
Construction	100% recycled aluminium construction Open drainable/closed construction Interlocking Plank system Fibre and rubber inserts
Sustainability	100% recycled aluminium. All inserts recyclable/re-usable 100% Econyl Fibre (Elite, Ultimate & Select)
Typical Application	High Traffic locations such as Public Buildings, Commercial Offices, travel termini etc
Design Options	Wide range of design options available Bespoke anodised to special order
Weight	12.5kg/m ²
Matwell Framing	INT019
Slip Rating	Will vary with insert, in excess of PTV 38
Warranty	10 years
Uniclass 2015	Pr_35_57_11_26 Entrance mats
CAWS	N10/300 Entrance matting

PROFILE

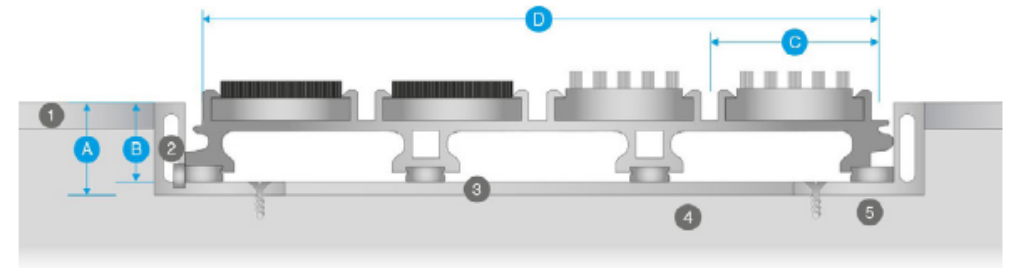

- A 19mm
- B 16.5mm
- C 31.5mm profile
- D 124.5mm plank size
- 1 Finished floor surface
- 2 Recessed matwell frame
- 3 Levelling latex to matwell base
- 4 Screed sub-floor
- 5 Screw fixings

PROFILE COLOUR OPTIONS

