


SPECIFICATION

INTRAFLOW® Plus

Product Reference	INTRAFLOW Plus Entrance Matting
Strength Rating	Extreme - suitable for areas with heavy foot and wheeled traffic
Zonal Location	Use Zone 1 inserts for external areas Use Zone 2 inserts for internal areas Combination Zone 1 & 2 inserts can be specified for dual performance Surface mounted applications with use of ramped edging
Construction	100% recycled aluminium construction Open drainable/closed construction Interlocking plank system Fibre and rubber inserts
Sustainability	100% recycled aluminum. All inserts recyclable/re-usable 100% Econyl Fibre (Elite, Ultimate & Select)
Typical Application	High Traffic locations such as Public Buildings, Commercial Offices, travel termini etc
Design Options	Wide range of design options available Bespoke anodised to special order
Weight	14.3kg/m ²
Matwell Framing	INT019
Slip Rating	Will vary with insert, in excess of PTV 38
Warranty	15 years
Uniclass 2015	Pr_35_57_11_26 Entrance mats
CAWS	N10/300 Entrance matting

PROFILE

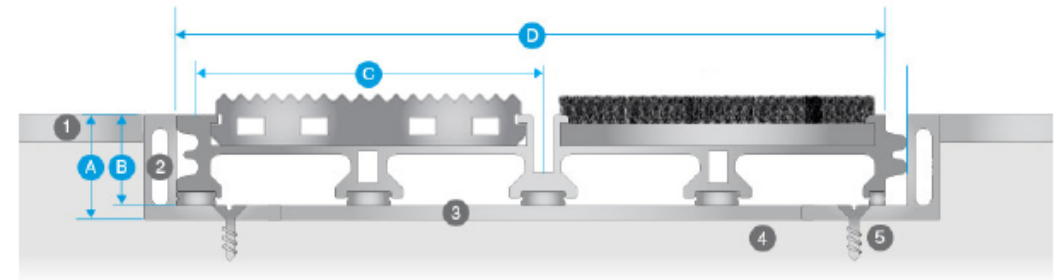

- | | |
|-----------|-----------------------------------|
| A 19mm | 1 Finished floor surface |
| B 16.5mm | 2 Recessed matwell frame |
| C 66.4mm | 3 Levelling latex to matwell base |
| D 132.8mm | 4 Screed sub-floor |
| | 5 Screw fixings |

PROFILE COLOUR OPTIONS

