


Rawson Entrance Matting

Trackmaster

Trackmaster is made from 100% Polypropylene Rating - Very Heavy Contract

Request a sample

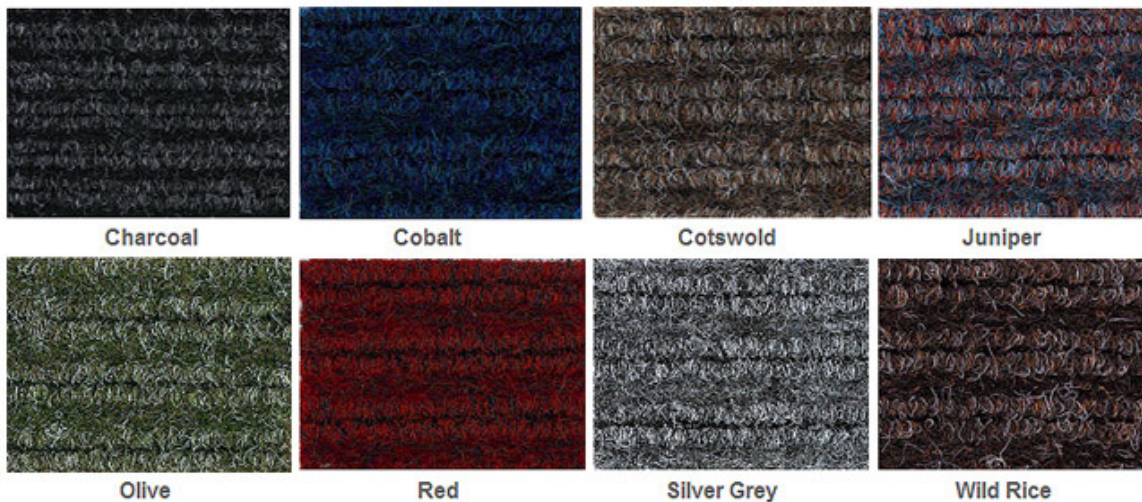

Technical Specifications

| | |
|-------------------------------------|----------------------|
| Fibre Type | 100% Polypropylene |
| Fibre Weight (+/-10%) | 1250g/m ² |
| Total Carpet Weight (+/-10%) | 2400g/m ² |
| Total Thickness (+/-10%) | 11.0mm |
| Dimensions | 2x25m |
| Backing Material | Rubber |

Industry Suitability

Entrances to all types of private and public sector buildings including, offices, retail centres, banks, line shops, schools, sports and leisure centres and change rooms.

Performance/Durability


| | | | | | | | |
|---------------|----------------|--------------|----------------|-------------------|---------|--------------|----------------|
| BS4939 Static | BS4502 Dynamic | BS1006 Light | BS1006 Shampoo | DD68 Body Voltage | IBM ICL | Castor Chair | BS4790 Hot Nut |
| >80% Recovery | 6+ | 4+ | <2 KV | Pass | Pass | Low Radius | |

Rawson Entrance Matting


Hercules




Albany Red

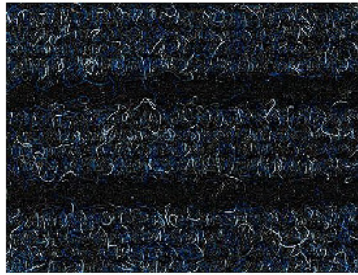


Azure

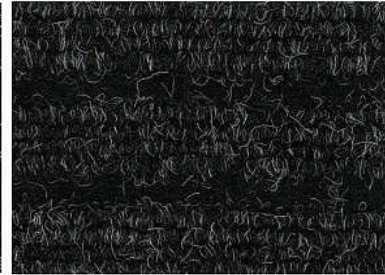

Charcoal

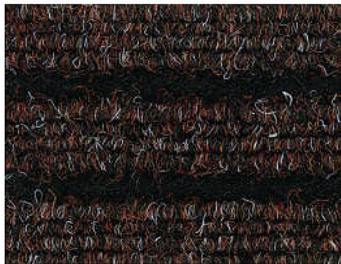

Chocolate

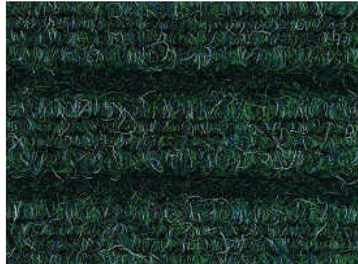

Saratoga Green



Silver Grey

Technical Specifications

| | |
|-------------------------------------|----------------------|
| Fibre Type | 100% Polypropylene |
| Fibre Weight (+/-10%) | 1400g/m ² |
| Total Carpet Weight (+/-10%) | 2820g/m ² |
| Total Thickness (+/-10%) | 10.5mm |
| Dimensions | 2x25m |
| Backing Material | Rubber |

Industry Suitability

Entrances to all types of private and public sector buildings including, offices, retail centres, banks, line shops, schools, sports and leisure centres and change rooms.


Performance/Durability

| | | | | | | | |
|---------------|----------------|--------------|----------------|-------------------|---------|--------------|----------------|
| BS4939 Static | BS4502 Dynamic | BS1006 Light | BS1006 Shampoo | DD68 Body Voltage | IBM ICL | Castor Chair | BS4790 Hot Nut |
| >80% Recovery | 6+ | 4+ | <2 KV | Pass | Pass | Low Radius | |



Rawson Entrance Matting

Dominator Plus

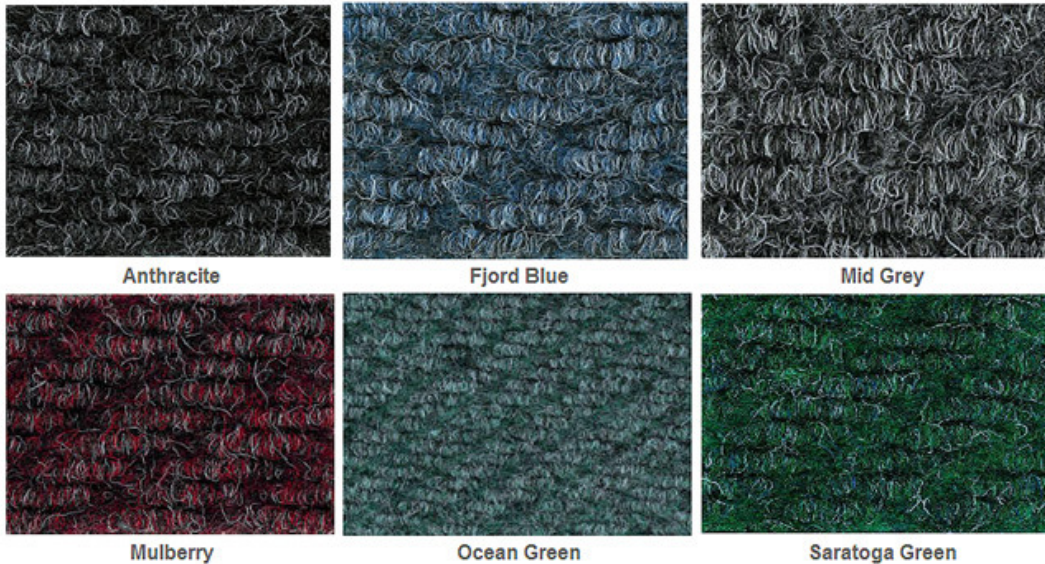

Technical Specifications

| | | |
|-------------------------------------|----------------------|----------------------|
| Fibre Type | 100% Polypropylene | |
| | Sheet | Tile |
| Fibre Weight (+/-10%) | 1500g/m ² | 1500g/m ² |
| Total Carpet Weight (+/-10%) | 2650g/m ² | 4600g/m ² |
| Total Thickness (+/-10%) | 10.5mm | 11.5mm |
| Dimensions | 2x12.5m | 50x50cm |
| Backing Material | Rubber | Bitumen |
| Tiles per Box | | 12 |

Industry Suitability

Entrances to all types of private and public sector buildings including, offices, retail centres, banks, line shops, schools, sports and leisure centres and change rooms.

Performance/Durability

| | | | | | | | |
|---------------|----------------|--------------|----------------|-------------------|---------|--------------|----------------|
| BS4939 Static | BS4502 Dynamic | BS1006 Light | BS1006 Shampoo | DD68 Body Voltage | IBM ICL | Castor Chair | BS4790 Hot Nut |
| >80% Recovery | 6+ | 4+ | <2 KV | Pass | Pass | Low Radius | |