



Milliken Obex[®] Prior[™] 16mm

Specification:

Syncros 16mm Milliken Obex[®] Prior[™] in Closed / Open Format



Closed Format

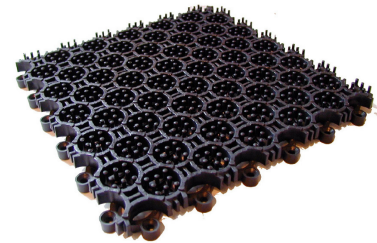

Open Format

Tile Material:	UV Resistant PVC
Tile Construction:	Closed / Open
Total thickness:	16mm
Tile Size:	Nominal 200 x200mm, (195x195mm when installed)
Tile Colour:	Graphite
Tile Construction; Composition:	100% PVC
Mass:	7110g/m ² (open) / 9340g/m ² (closed)
Tile thickness:	16mm

Performance:	
Flammability;	low radius of effect of ignition (BS4790)
Friction resistance;	Class B – DS/EN ISO 8295 (2004)
Wear resistance:	pass (66,000 cycles Vetterman test)
Ozone resistance:	pass (50pphm ozone at 30c)
Temperature resistance:	-30c to +50c


Milliken Obex[®] Prior[™] 16mm Closed / Open format entrance mat system. Supplied and installed if required by Syncros Entrance Matting Systems, Triumph Way, Kempston, Beds, MK42 7QB, and Tel. 01234 314314 / Fax 01234 314306 / E-mail: sales@syncros.co.uk in accordance with the manufacturer's installation details.

Milliken Obex[®] Prior[™] 11mm



Specification:

Syncros 11mm Milliken Obex[®] Prior[™] in Closed

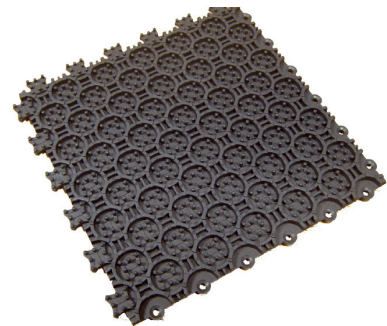

11mm Prior[™] Closed Format

Tile Material:	UV Resistant PVC
Tile Construction:	Closed
Total thickness:	11mm
Tile Size:	Nominal 200 x200mm, usable 195 xs195mm when installed
Tile Colour:	Graphite

Tile Construction;	
Composition:	100% PVC
Total Weight:	5420g/m ²
Tile thickness:	11mm

Performance:	
Flammability;	low radius of effect of ignition (BS4790)
Friction resistance;	B – DS/EN ISO 8295 (2004)
Wear resistance:	pass (22,000 cycles Vetterman test)
Ozone resistance:	pass (50pph ozone at 30c)
Temperature resistance: -	30c to +50c

Milliken Obex[®] Prior[™] 11mm Closed format entrance mat system. Supplied and installed if required by Syncros Entrance Matting Systems, Triumph Way, Kempston, Beds, MK42 7QB, and Tel. 01234 314314 / Fax 01234 314306 / E-mail: sales@syncros.co.uk in accordance with the manufacturer's installation details.