


INTR^Aform Low Profile


Specification Sheet

INTR^Aform low profile™

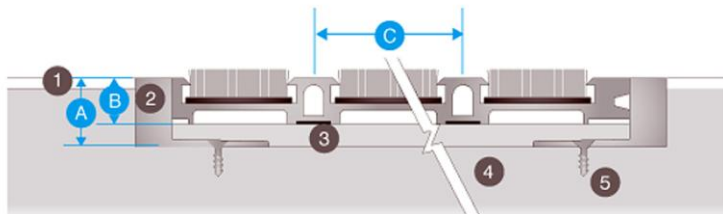

- A. 14mm
- B. 11mm
- C. 33mm profile

1. Finished floor surface
2. Recessed matwell frame
3. Levelling latex to matwell base
4. Screed sub-floor
5. Screw fittings



Polypropylene



Polyamide



Product Reference

INTR^Aform Low Profile Heavy Duty Entrance Matting

Installation

Into suitable recessed matwell area, with surface of mat level with adjoining floor covering
Surface mounted applications with use of ramped edging

Location

High Traffic environments
Internal Applications – Fibre, Brush and Ribbed Rubber Inserts
External Applications – Brush and Ribbed Rubber Inserts

Construction

100% recycled aluminium construction
Closed Construction
Interlocking Plank system

Weight

12kg/m²

Depth

11mm

Temperature Resistance

Aluminium resistant -50°C to +90°C

Matwell Framing

INT014 & INTR012

Installation

Mill Finish Aluminium as standard Anodised in any RAL colour to special order

