


# INTR<sup>A</sup>form


## Specification Sheet

INTR<sup>A</sup>form™

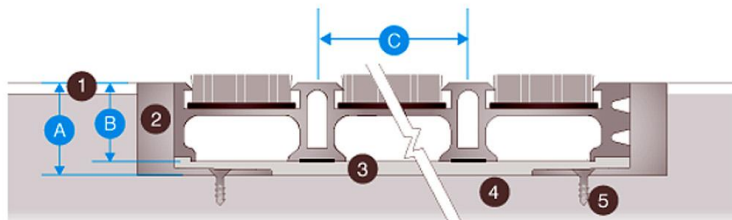

- A. 21mm
- B. 18mm
- C. 33mm profile

1. Finished floor surface
2. Recessed matwell frame
3. Levelling latex to matwell base
4. Screed sub-floor
5. Screw fittings

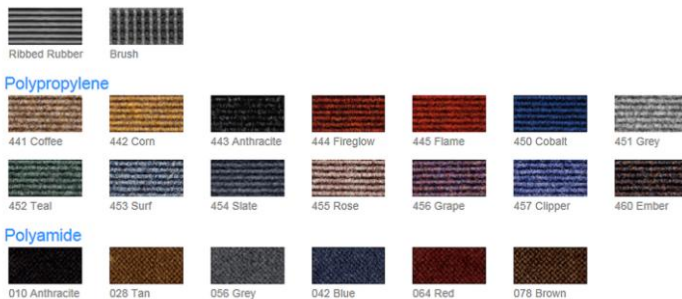

<b>Product Reference</b>	INTR <sup>A</sup> form Heavy Duty Entrance Matting
<b>Installation</b>	Into suitable recessed matwell area, with surface of mat level with adjoining floor covering Surface mounted applications with use of ramped edging
<b>Location</b>	High Traffic environments Internal Applications – Fibre, Brush and Ribbed Rubber Inserts External Applications – Brush and Ribbed Rubber Inserts
<b>Construction</b>	100% recycled aluminium construction Closed Construction Interlocking Plank system
<b>Weight</b>	15.2kg/m <sup>2</sup>
<b>Depth</b>	18mm
<b>Temperature Resistance</b>	Aluminium resistant -50°C to +90°C
<b>Matwell Framing</b>	INT021
<b>Installation</b>	Mill Finish Aluminium as standard Anodised in any RAL colour to special order

