



EMCO Radial

emco RADIAL (522 RD/R, 522 RD/G, 522 RD/CB)

Recommended for: RD/R for indoor areas (zone 2); RD/G and RD/CB for outdoor areas (zone 1)
Load: Heavy to very heavy

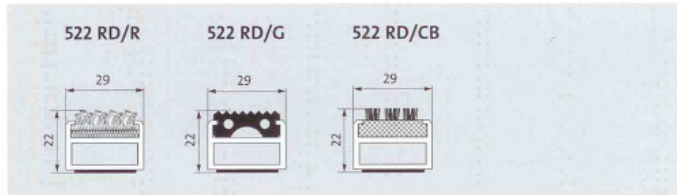

Type	Profile spacing (mm)	Height (mm)	Max. available width/profile length for individual units (mm)	Max. available depth/walking depth for individual units (mm)	Weight (kg/m ²)
522 RD/R	5	22	3000 ¹⁾	980 ¹⁾	16,8
522 RD/G	5	22	3000 ¹⁾	980 ¹⁾	20,8
522 RD/CB	5	22	3000 ¹⁾	980 ¹⁾	19,2



Frame	Dimensions (H x W x D) in mm	Material
500/25	25 x 28 x 3 25 x 25 x 3 25 x 28 x 3	Aluminium Natural brass Stainless steel ²⁾

¹⁾ These values relate to a maximum mat weight of 45 kg ²⁾ Stainless steel, material no. 1.4301 (V2A)

Description: Hard-wearing entrance mat with radial curve; frame and entrance mat supplied as a single unit; suitable for wheelchairs

Colours: **Type R:** Standard: Light grey, anthracite, beige, blue; for special colours, refer to page 17; light grey and anthracite versions also available with Cf1- s1 classification in accordance with EN 13501-1 (formerly B1) at an additional cost.

Support chassis: Rigid aluminium with impact sound insulation underlay

Type G: Black; also available with Bfl- s1 classification in accordance with EN 13501-1 (formerly B1) at an additional cost
Type CB: Grey, black

Tread surfaces: **Type R:** Recessed, robust, coarse fibre ribbed carpet strips (R 11 slip resistance*); also available with MAXIMUS insert at an additional cost (pages 38 and 39)

DIN 51130

Type G: Recessed, robust, weather-proof grooved rubber inserts (R 9 slip resistance*)
Type CB: Recessed, robust, weather-proof cassette sections, equipped with bristle bundles arranged parallel to one another (R 13 slip resistance*). Actual mat height: +1 to 2 mm.
*As per DIN 51130

Connection: Stainless steel threaded rod

Profile spacing: Rubber spacers

DIN 18650

For details on frames, refer to page 58; for mat divisions as per factory standards and surcharges for shaped designs, cut-outs and angled designs, refer to pages 69 and 70.

522 RD/R with ribbed carpet insert (zone 2)



522 RD/G with rubber insert (zone 1)



522 RD/CB with cassette brush (zone 1)

