


EMCO Marschall

17mm / 22mm Aluminium Primary Entrance Matting

emco MARSCHALL with ribbed carpet insert and cassette brush (RCB)

Recommended for: Indoor and covered outdoor areas (zones 1 and 2)

Load: Very heavy

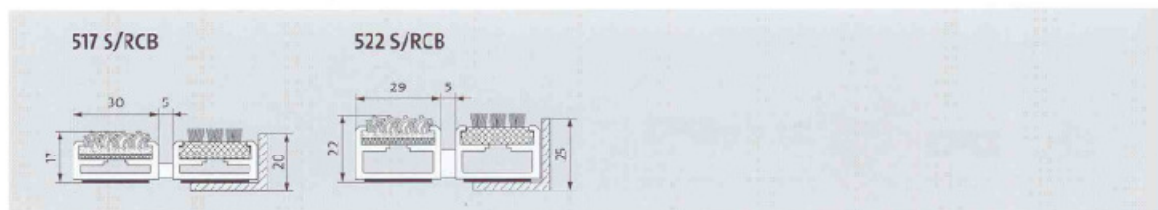

Type	Profile spacing (mm)	Height (mm)	Max. available width/profile length for individual units (mm)	Max. available depth/walking depth for individual units (mm)	Weight (kg/m ²)	Frame	Dimensions (H x W x D) in mm	Material
517 S/RCB	5	17	3000 ¹⁾	3000 ¹⁾	14,0	500/20	20 x 30 x 3 20 x 25 x 3	Aluminium Stainless steel ²⁾
522 S/RCB	5	22	3000 ¹⁾	3000 ¹⁾	17,5	500/25	25 x 28 x 3 25 x 25 x 3 25 x 28 x 3	Aluminium Natural brass Stainless steel ²⁾

¹⁾ These values relate to a maximum mat weight of 45 kg ²⁾ Stainless steel, material no. 1.4301 (V2A)

Description: Roll-up, extremely hard-wearing entrance matting designed to withstand wheeled traffic (for load values, refer to page 66); suitable for wheelchairs

Colours: Ribbed carpet (standard): Light grey, anthracite, beige, blue; for special colours, refer to page 17
Cassette brushes: Grey, black

Support chassis: Rigid aluminium with impact sound insulation underlay

Connection: Plastic coated steel wire

Tread surface
Type RCB: Recessed, robust, coarse fibre ribbed carpet strips (R11 slip resistance as per DIN 51130) combined with cassette sections; equipped with bristle bundles arranged parallel to one another (R13 slip resistance as per DIN 51130). Actual mat height for CB insert: +1 to 2 mm.

Profile spacing: Rubber spacers; also option of 3 mm profile spacing for automatic door systems in acc. with DIN 18650

For details on frames, refer to page 58; for mat divisions as per factory standards and surcharges for shaped designs, cut outs and angled designs, refer to pages 69 and 70.

